

MiVoice 6725ip Microsoft® Lync™ Phone

41-001367-00 REV03

QUICK START GUIDE

NOTICE

The information contained in this document is believed to be accurate in all respects but is not warranted by Mitel Networks™ Corporation (MITEL®). The information is subject to change without notice and should not be construed in any way as a commitment by Mitel or any of its affiliates or subsidiaries. Mitel and its affiliates and subsidiaries assume no responsibility for any errors or omissions in this document. Revisions of this document or new editions of it may be issued to incorporate such changes.

No part of this document can be reproduced or transmitted in any form or by any means - electronic or mechanical - for any purpose without written permission from Mitel Networks Corporation.

Trademarks

Mitel is a trademark of Mitel Networks Corporation.

Other product names mentioned in this document may be trademarks of their respective companies and are hereby acknowledged.

MiVoice 6725ip Microsoft® Lync™ Phone Quick Start Guide

41-001367-00 REV03 - December 2014

®,™ Trademark of Mitel Networks Corporation
© Copyright 2014, Mitel Networks Corporation
All rights reserved

| | |
|--|---|
| MiVoice 6725ip Lync™ Phone | 1 |
| Assemble your phone | 1 |
| To assemble your phone | 1 |
| Sign in using Lync | 3 |
| To sign in using Lync | 3 |
| Sign in using a Personal Identification Number (PIN) | 4 |
| To create or reset your sign in PIN | 4 |
| To sign into your phone using your PIN | 5 |
| Configure your PIN to unlock the phone | 6 |
| To configure your PIN to unlock the phone | 6 |
| Customize your phone | 7 |

MIVOICE 6725IP LYNC™ PHONE

The MiVoice 6725ip Lync phone is designed to be used by information workers. For more information about phone specifications, see the MiVoice 6725ip Lync Phone website at www.mitel.com/product-service/mivoice-6725-lync-phone.

ASSEMBLE YOUR PHONE

TO ASSEMBLE YOUR PHONE

1. Connect one end of the network cable to the network jack marked LAN on the back of the MiVoice 6725ip desk phone.
2. Connect the other end of the network cable to a network jack on the wall.
3. Connect the round end of the power cord to the back of the phone.



Note: AC power connection is optional if you are using Power over Ethernet (PoE).

4. Plug the other end of the power cord into a power outlet. The display screen lights up, and the phone starts.




Note: AC power connection is optional if you are using Power over Ethernet (PoE).


5. Connect one end of the handset cord to the handset.



Note: Ensure the handset cord is fully inserted into the handset RJ11 jack.

6. Connect the other end of the handset cord to the RJ11 jack marked  on the back of the phone.
7. (Optional) Connect the Type A (larger, rectangular) end of USB cable to a USB port on your computer.
8. (Optional) Connect the Type B (smaller, square) end of the USB cable to the back of the phone.

9. Once the cables are connected, you may see an animation that indicates for you to press the **OK** button on the phone. After pressing the select button you also may be asked to select a language.

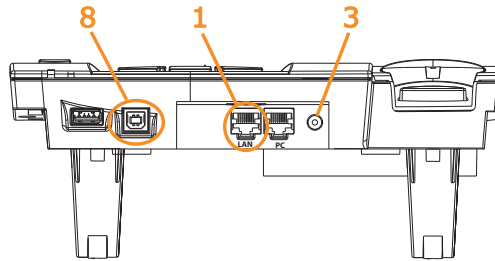

Note: The USB Type A connection that is on the phone is disabled by the software at this time.

SIGN IN USING LYNC

If Lync software is installed on your computer, you can simplify the phone sign in process by connecting the USB cable from your computer to your phone.

TO SIGN IN USING LYNC

1. If you have not already done so, connect the Type A (larger, rectangular) end of the USB cable to a USB port on your computer and the Type B (smaller, square) end of the USB cable to the back of the phone.



2. The connection is detected and you are prompted for your user name and password on your computer. If you use Lync with Office 365, type in your user name as username@domain.com (e.g. georgeb@acme.com). If you don't use Office 365, type your user name as domain\username (for example, acme\georgeb). The phone then begins the sign-in process.



Note: If you have already configured Lync to use another audio device, for example a headset, you must change the selected device in Lync. On your computer, open Lync , and on the lower left part of the Lync main window, click the **Primary Device** icon, click **Audio Device Settings**, and then select the MiVoice 6725ip as your audio device.

SIGN IN USING A PERSONAL IDENTIFICATION NUMBER (PIN)

If you do not have Lync installed on your computer, you can sign into Lync by using a sign in Personal Identification Number (PIN). However, you will have limited access to certain features, such as voice mail, calendar, and call logs, as well as reduced functionality.

TO CREATE OR RESET YOUR SIGN IN PIN

1. On your computer, do one of the following:
 - Open a Microsoft® Outlook® meeting request, and then click **“Forgot your dial-in PIN?”**
 - Open a webpage, and in the Address bar of your web browser, type the address of the Dial-in Conferencing Settings page that was provided to you by your support team. For example: <https://dialin.yourdomain.com>.
2. From the PIN settings page, click **Sign In**, and then create or reset your PIN.



Note: Depending on what version of Lync you’re using, your screen might look slightly different from the following.

Lync Server 2013

Dial-in Conferencing Settings and PIN Management


Personal Identification Number (PIN)

To set your PIN and Conference ID you must first sign in.

[Sign In](#)

TO SIGN INTO YOUR PHONE USING YOUR PIN

1. If you do not have a computer connected to the phone, from the Welcome screen, select **No**.

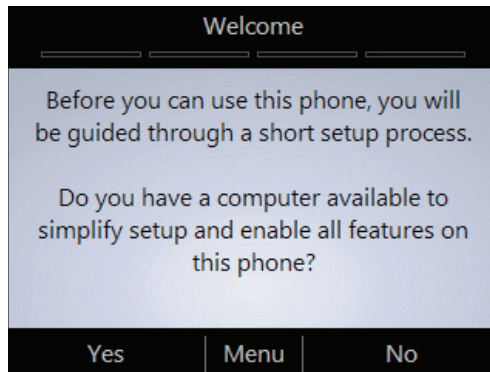

2. Enter your phone number or extension, and then select **Next**.



3. Enter your PIN, and then select **Sign In**.

CONFIGURE YOUR PIN TO UNLOCK THE PHONE

For security, the phone locks if you leave it unattended for a period of time (determined by your Lync Server Administrator). To unlock it, use your unlock PIN. During the desk phone setup process, you are prompted to create a PIN that can be used to unlock your phone.

TO CONFIGURE YOUR PIN TO UNLOCK THE PHONE

- On the **Desk Phone Setup** screen, enter your PIN in each text box, and then select **Done**.



The screenshot shows a mobile interface titled "Desk Phone Setup". It contains two text input fields, each with "*****" inside, indicating a 6-digit PIN. The first field is preceded by the instruction "Create a 6-digit phone-unlock PIN, and then press Next." The second field is preceded by "Re-enter the new PIN.". At the bottom of the screen, there are three buttons: "Done", "Menu", and "Backspace".




IMPORTANT: WHEN THE PHONE REMAINS IDLE FOR A PERIOD OF TIME, IT SIGNS OFF AUTOMATICALLY. (IDLE PERIOD IS DETERMINED BY YOUR LYNC SERVER ADMINISTRATOR.)

CUSTOMIZE YOUR PHONE

To complete the Desk Phone Setup process, you will be prompted to customize your phone settings, such as the time zone, the date, and the time format.

To customize your phone

1. On the **Desk Phone Setup** screen, select **Next**.
2. Select your time zone, date format, and time format, and then select **Next**.
3. Select **Done** to start using your phone, or select **Settings** for more options.

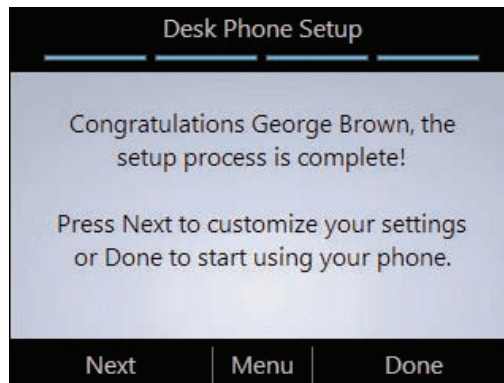

Note: After your phone is set up, you can access the Settings menu at any time by selecting the **Menu** button, and then selecting **Settings**.



mitel.com

© Copyright 2014, Mitel Networks Corporation. All Rights Reserved. The Mitel word and logo are trademarks of Mitel Networks Corporation. Any reference to third party trademarks are for reference only and Mitel makes no representation of ownership of these marks.